

PHYSICS

NEET and JEE Main 2020 : 45 Days Crash Course

Waves

By,
Ritesh Agarwal, B. Tech. IIT Bombay


Wave motion

In wave motion energy or momentum is transferred from one place to another without the actual transfer of matter.

Transverse Waves

The particles of medium vibrate in a direction perpendicular to the direction of propagation of wave.


Crest (C) & Trough (T) are formed

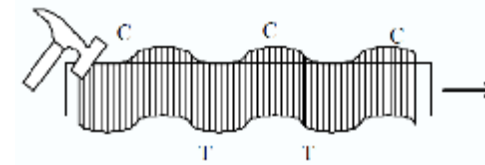

Longitudinal Waves

The particles of medium vibrate in a direction of wave propagation

Wave proceeds in form of compression (C) & rarefaction (R)

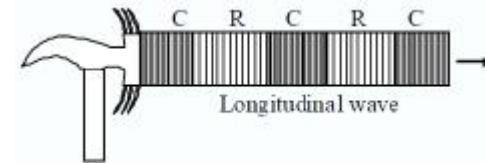

Equation of plane progressive wave

(i) Equation of progressive wave in positive x direction

$$y = A \sin \omega (t - x/v) = A \sin (\omega t - kx + \phi)$$

Same sign (-ve x dir)

() t () x

(ii) Equation of progressive wave in negative x direction

$$y = A \sin \omega (t + x/v) = A \sin (\omega t + kx + \phi)$$

opp. sign (+ve x dir)

$$\omega = 2\pi f$$

$$= \frac{2\pi}{T}$$

Wave velocity and particle velocity

propagation const (Ang. wave no.) \rightarrow $k = \frac{\omega}{v} = \frac{2\pi}{\lambda}$

$$y = 2 \text{ mm } \sin \left(2\pi t - \frac{\pi}{2} x + 30^\circ \right)$$

ω k ϕ

$$v = \frac{\omega}{k}$$

Wave velocity

find speed of wave

$$v = \frac{\omega}{k} = \frac{2\pi}{\pi/2} = 4$$

Particle velocity, $v_p = \frac{\partial y}{\partial t} = \omega A \cos (\omega t - kx + \phi)$

$$v_{p, \text{max}} = \omega A$$

Acc. of particle, $a_p = \frac{dv_p}{dt} = \frac{d^2 y}{dt^2} = -\omega^2 A \sin (\omega t - kx + \phi) = -\omega^2 y$

$$v_p = -v \times \text{slope}$$

$$\frac{\partial y}{\partial t} = -v \times \frac{\partial y}{\partial x}$$

Wave Length (λ) and Intensity


The distance between two consecutive particle in the same phase or the distance travelled by the wave in one periodic time and denoted by λ

$v = f\lambda$ or $\lambda = vT$

freq.

 $v_p = -v$ (slope)

 \propto - slope

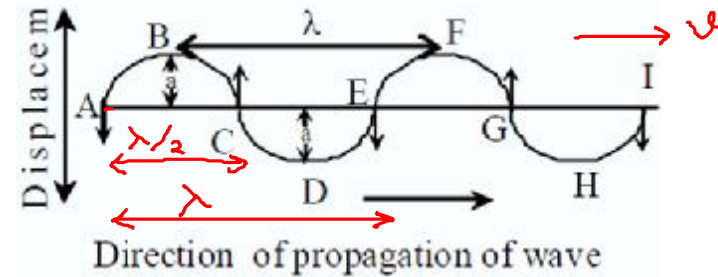

Intensity of Wave

In medium, propagation energy perpendicular to per unit area per second is called intensity of wave.

$$I = 2\pi^2 f^2 a^2 \rho v$$

$$I \propto a^2$$

$$\propto f^2$$



Same phase, $\Delta x = n\lambda$
 $= \lambda, 2\lambda, 3\lambda$

Opp. phase, $\Delta x = (2n+1)\frac{\lambda}{2}$
 $= \frac{\lambda}{2}, \frac{3\lambda}{2}, \frac{5\lambda}{2}$

The Speed of Transverse Waves on Strings

The speed of a wave on a string is given by

$$v = \sqrt{\frac{T}{\mu}}$$



where T is tension in the string (in Newtons) and μ is mass per unit length of the string (kg/m).


It should be noted that v is speed of the wave w.r.t. the medium (string).

In case the tension is not uniform in the string or string has nonuniform linear mass density then v is speed at a given point and T and μ are corresponding values at that point.

Example. Find speed of the wave generated in the string as in the situation shown. Assume that the tension is not affected by the mass of the cord.

Solution : $T = 20 \times 10 = 200 \text{ N}$

$$v = \sqrt{\frac{200}{0.5}} = 20 \text{ m/s}$$

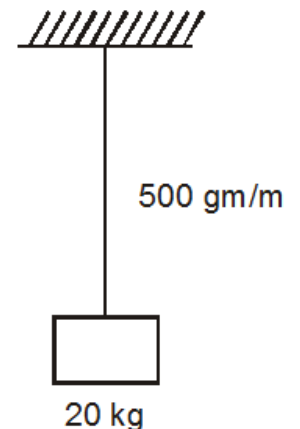

Speed of Sound Waves

Velocity of sound waves in a linear solid medium is given by

$$v = \sqrt{\frac{Y}{\rho}}$$

where Y = young's modulus of elasticity and ρ = density.

$$PV^m = \text{const}$$

$$B = m\rho$$

Velocity of sound waves in a fluid medium (liquid or gas) is given by

$$v = \sqrt{\frac{B}{\rho}}$$

where, ρ = density of the medium and B = Bulk modulus of the medium

Newton's formula : Newton assumed isothermal process.

$$PV = \text{constant}$$

and hence $B = P$

$$v = \sqrt{\frac{P}{\rho}} = \sqrt{\frac{RT}{M}}$$

where M = molar mass

Laplace's correction : Laplace established that propagation of sound in a gas is an adiabatic process and hence $PV^\gamma = \text{constant}$

$$\text{where, } B = -V \frac{dP}{dV} = \gamma P$$

and hence speed of sound in a gas, $v = \sqrt{\frac{\gamma P}{\rho}} = \sqrt{\frac{\gamma RT}{M_0}}$

Interference

When waves of equal frequency & nearly equal amplitude is superimposed, interference occurs.

Mathematical Interference -

At a time t , at point x two waves of equal frequency $y_1 = a_1 \sin(\omega t - kx_1 + \phi_1)$ & $y_2 = a_2 \sin(\omega t - kx_2 + \phi_2)$ is super-imposed, then Amplitude A & Intensity I of Resultant wave :

$$A^2 = a_1^2 + a_2^2 + 2a_1 a_2 \cos \Delta\phi$$

$$\& I = I_1 + I_2 + 2 \sqrt{I_1 I_2} \cos \Delta\phi$$

$$\Delta\phi = k(x_1 - x_2) + \phi_2 - \phi_1 = k\Delta x + \Delta\phi_0 \approx k\Delta x \quad \text{Path diff.}$$

Intensity of resultant wave changes periodically from minimum to maximum & maximum to minimum from one point to another point

Constructive Interference :

Where, phase difference $\Delta\phi = 2n\pi$

path difference $\Delta x = n\lambda$

$$I_{\max} \propto (a_1 + a_2)^2$$

$$I_{\max} = (\sqrt{I_1} + \sqrt{I_2})^2$$

$$A_{\max} = A_1 + A_2$$

Destructive Interference :

Where phase difference $\Delta\phi = (2n - 1)\pi$


path difference $\Delta x = \left(n - \frac{1}{2}\right) \lambda$

$$I_{\min} \propto (a_1 - a_2)^2$$

$$I_{\min} = (\sqrt{I_1} - \sqrt{I_2})^2$$

$$A_{\min} = |A_1 - A_2|$$

Reflection & Transmission of Wave

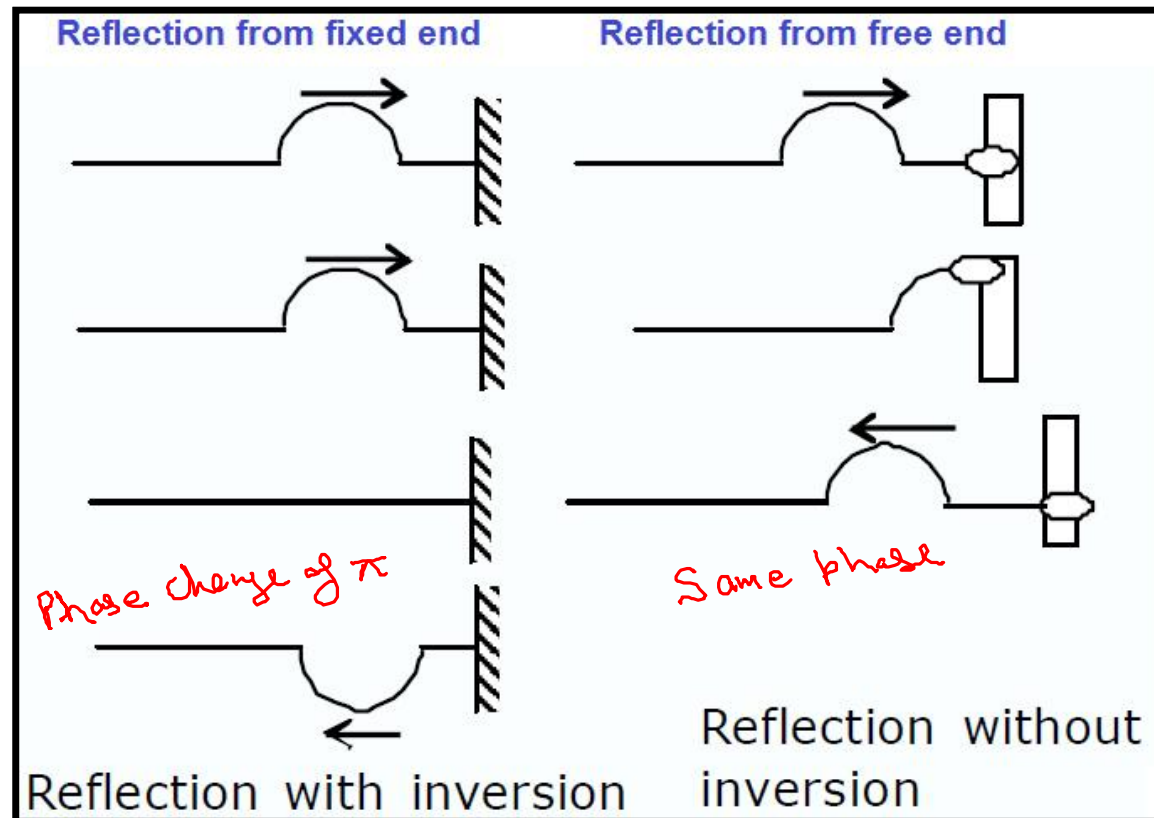

Standing Waves

Suppose two sine waves of equal amplitude and frequency propagate on a long string in opposite directions. The equations of the two waves are given by

$$y_1 = A \sin(\omega t - kx) \quad \text{and} \quad y_2 = A \sin(\omega t + kx).$$

These waves interfere to produce what we call standing waves.

The resultant displacements of the particles of the string are given by the principle of superposition as

$$y = y_1 + y_2 \\ = A [\sin(\omega t - kx) + \sin(\omega t + kx)] = 2A \sin \omega t \cos kx$$

or,

$$y = (2A \cos kx) \sin \omega t.$$

Amplitude of standing wave

The amplitude of the wave

$$A_s = 2A |\cos kx| \quad A_{\max} = \cancel{2} 2A$$

is not constant but varies periodically with position (and not with time as in beats).


The points for which amplitude is minimum are called nodes

The points for which amplitude is maximum are called antinodes

in a stationary wave, nodes and antinodes are also equally spaced with spacing $(\lambda/2)$

nodes and antinodes are alternate with spacing $(\lambda/4)$.

Standing Waves

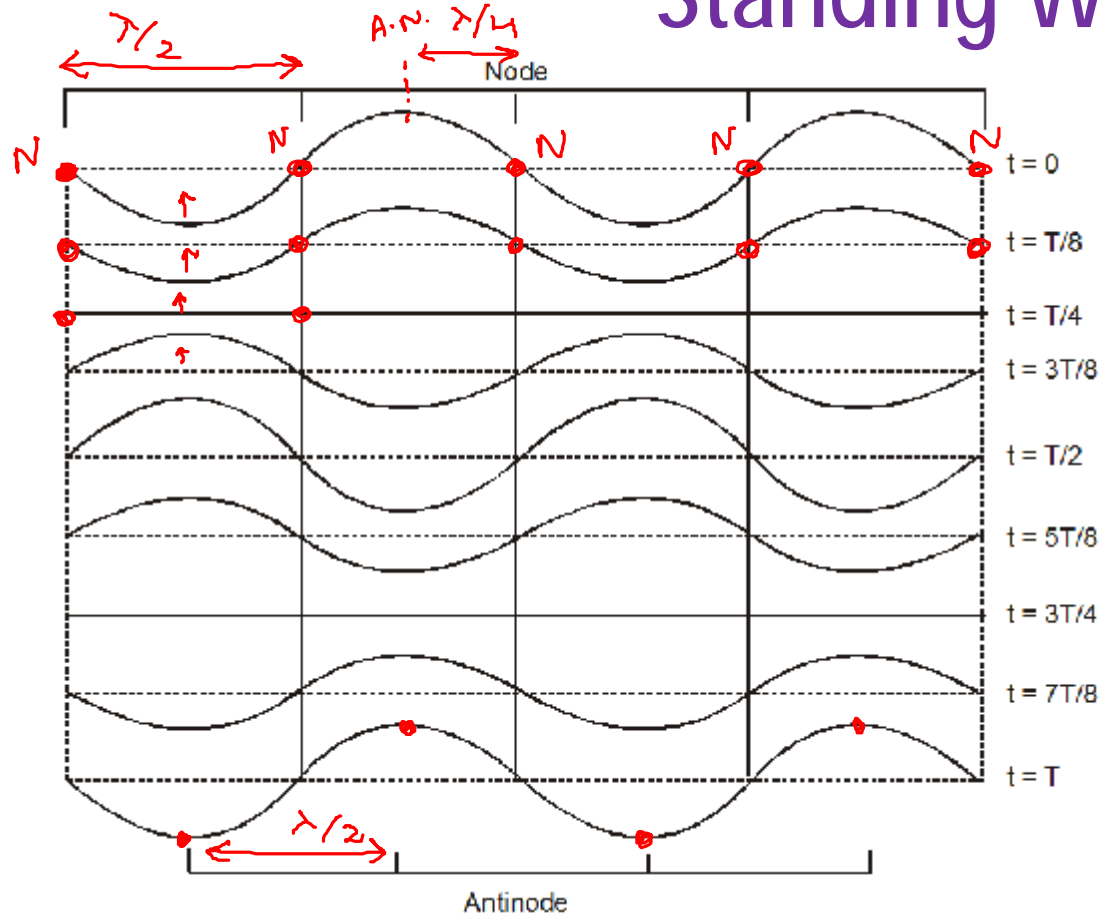


Net transfer of energy across nodes becomes zero.

Standing wave

T.W.

Vibration of String fixed at both ends or organ pipe open at both ends


Vibration on String

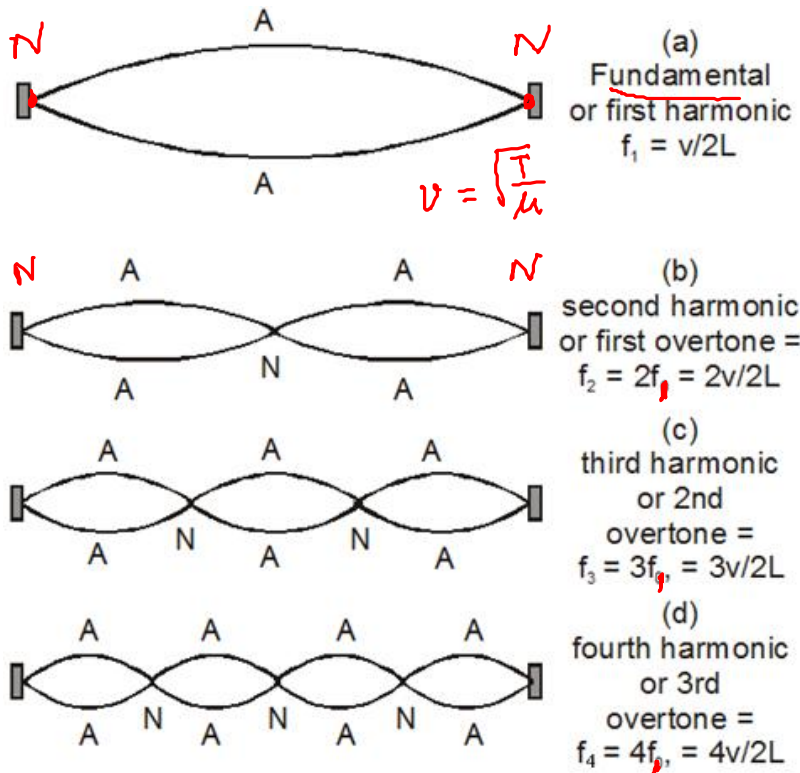

displacement wave

Vibration in Organ Pipe

pressure wave

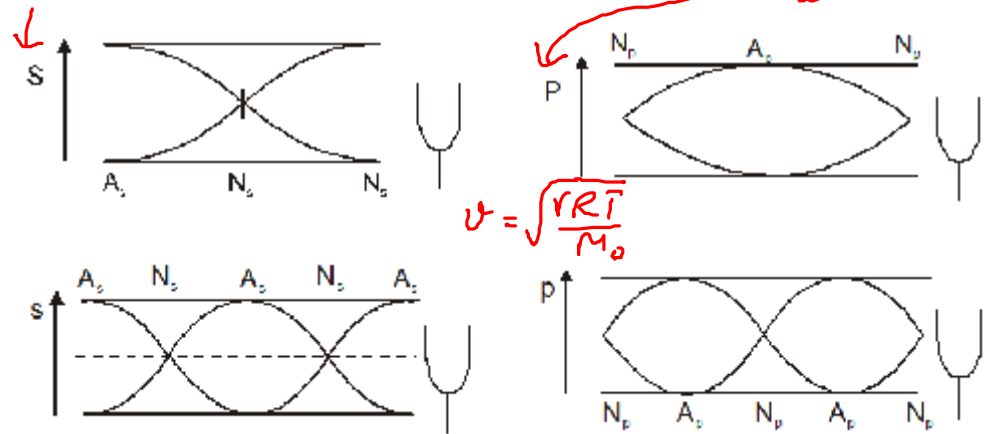

$$v = \sqrt{\frac{\gamma RT}{M_0}}$$

$$f_n = nf_1$$

$$f_1 : f_2 : f_3 : \dots = 1 : 2 : 3 : \dots$$

$$v = f\lambda$$

$$f \propto \frac{1}{\lambda}$$

$$f_{\min} \lambda_{\max}$$


(n-1)th overtone

or nth harmonic


$$f_8 - f_7 = f_1$$

Vibration of String fixed at one end

Vibration on String

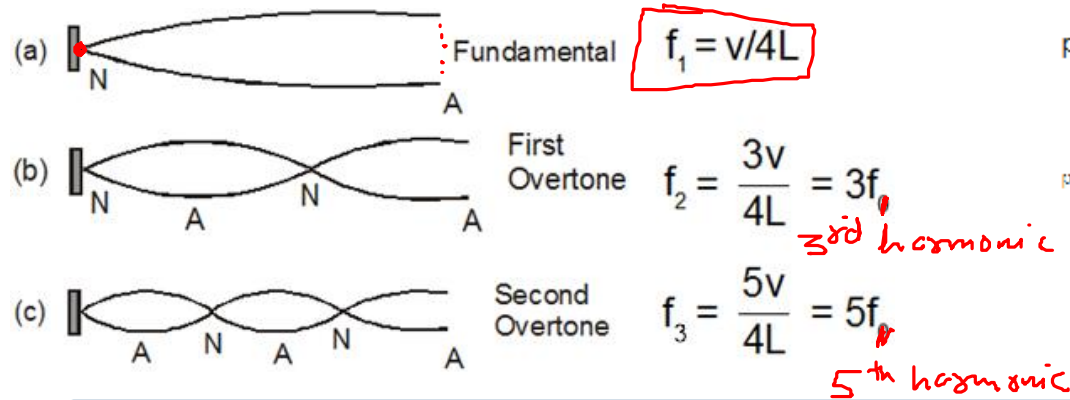

Vibration in Organ Pipe

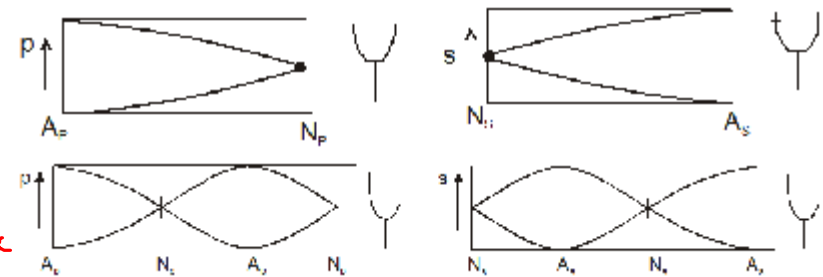

$$f_n = (2n-1)f_1$$

$$f_1 : f_2 : f_3 : \dots = 1 : 3 : 5 : \dots$$

(n-1)th overtone

(2n-1)th harmonic

Laws of transverse vibrations of a string - Sonometer Wire


(a) Law of length $f \propto \frac{1}{L}$ so $\frac{f_1}{f_2} = \frac{L_2}{L_1}$; if T & μ are constant

(b) Law of tension $f \propto \sqrt{T}$ so $\frac{f_1}{f_2} = \sqrt{\frac{T_1}{T_2}}$; if L & μ are constant

(c) Law of mass $f \propto \frac{1}{\sqrt{\mu}}$ so $\frac{f_1}{f_2} = \sqrt{\frac{\mu_2}{\mu_1}}$; if T & L are constant

$$f_1 = \frac{v}{2L}$$

$$= \frac{1}{2L} \sqrt{\frac{T}{\mu}}$$

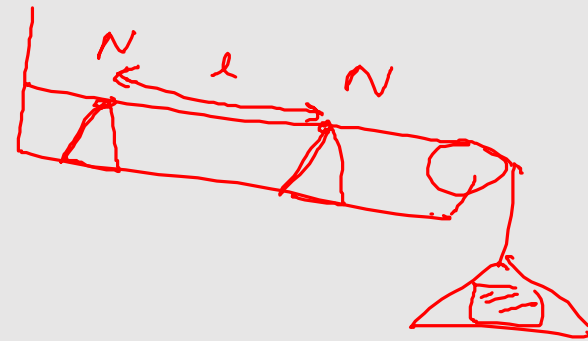

End Correction

As mentioned earlier the displacement antinode at an open end of an organ pipe lies slightly outside the open end. The distance of the antinode from the open end is called end correction and its value is given by

$$e = 0.6r$$


where r = radius of the organ pipe.

with end correction, the fundamental frequency of a closed pipe (f_c) and an open organ pipe (f_o) will be given by

$$f_c = \frac{v}{4(l + 0.6r)}$$

and

$$f_o = \frac{v}{2(l + 1.2r)}$$

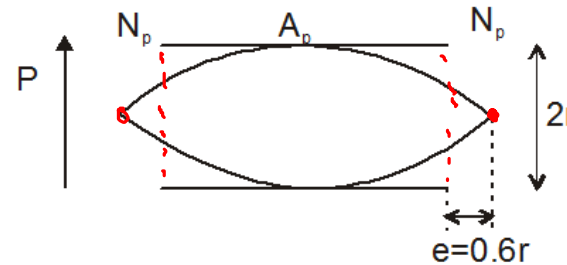

$$f = \frac{v}{4(l + e)}$$

$$f = \frac{v}{2(l + 2e)}$$

Loudness

DECIBEL SCALE :

The logarithmic scale which is used for comparing two sound intensity is called **decibel scale**.

The intensity level β described in terms of decibels is defined as

$$L = 10 \log \left(\frac{I}{I_0} \right) \text{ (dB)}$$

Here I_0 is the threshold intensity of hearing for human ear

i.e. $I = 10^{-12} \text{ watt/m}^2$.

$$\begin{aligned} L_2 - L_1 &= 10 \log \left(\frac{I_2}{I_0} \right) - 10 \log \left(\frac{I_1}{I_0} \right) \\ &= 10 \log \left(\frac{I_2}{I_0} \times \frac{I_0}{I_1} \right) \end{aligned}$$

$$L_2 - L_1 = 10 \log \frac{I_2}{I_1}$$

Interference in time : Beats

When two sound waves of same amplitude and different frequency superimpose, then intensity at any point in space varies periodically with time. This effect is called beats.

Beat frequency,	$f_B = f_1 - f_2$
Time Period,	$T_B = \frac{1}{f_1 - f_2}$

$$f_B = |f_1 - f_2|$$

IMPORTANT POINTS :

- (i) Beat phenomenon can be used for determining an unknown frequency by sounding it together with a source of known frequency.
- (ii) If the arm of a tuning fork is waxed or loaded, then its frequency decreases.
- (iii) If arm of tuning fork is filed, then its frequency increases.

$$T \uparrow \quad f \downarrow$$

$$T = 2\pi \sqrt{\frac{m}{k}}$$

Doppler's Effect

The apparent change in frequency or wavelength observed by the observer when there is a relative motion between the source and the observer, is known as Doppler Effect.

If source and observer both are moving with velocities v_s and v_o along the line joining them

The observed frequency,

$$f' = f \left(\frac{v \pm v_o}{v \mp v_s} \right)$$

Speed of sound (pointing to v)

obs. Officer
Source

$$\left(\frac{v + v_o}{v - v_s} \right) f$$

Dist. ↓ $f \uparrow$

Dist. ↑ $f \downarrow$

$$f' = \left(\frac{v + v_o \cos \theta}{v} \right) f$$

$$\left(\frac{v - v_o}{v - v_s} \right) f$$


$$\left(\frac{v - v_o}{v + v_s} \right) f$$

Example

A tuning fork is vibrating at frequency 100 Hz. When another tuning fork is sounded simultaneously, 4 beats per second are heard. When some mass is added to the tuning fork of 100 Hz, beat frequency decreases. Find the frequency of the other tuning fork.

Sol.

$|f - 100| = 4 \Rightarrow f = 96 \text{ or } 104$
 when 1st tuning fork is loaded its frequency decreases and so does beat frequency
 $\Rightarrow 100 > f$
 $\Rightarrow f = 96 \text{ Hz.}$

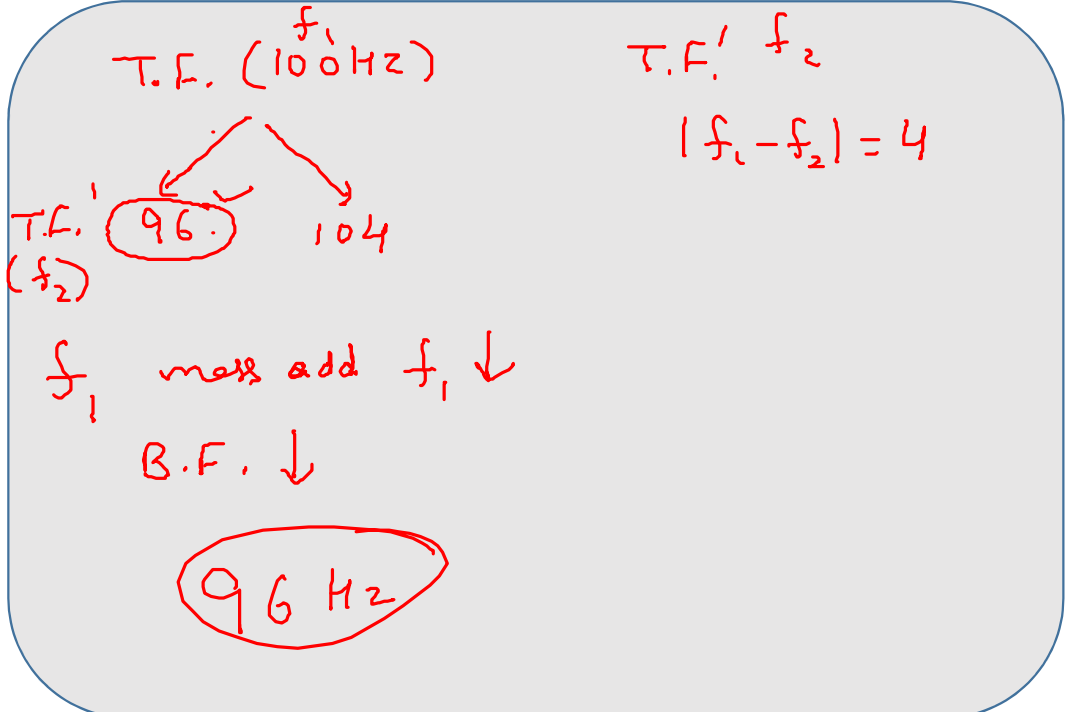

f_1
 T.F. (100 Hz)

f_2
 T.F. f_2

$|f_1 - f_2| = 4$

T.F. f_1
 (96) 104

f_1 mass add $f_1 \downarrow$
 B.F. \downarrow

96 Hz

Example

Two sirens, situated at a distance of 1 km, are emitting sound of frequency 330 Hz. An observer is moving from one siren towards another with a velocity of 2m/s. The beat frequency heard by the observer will be ($v = 330\text{m/s}$)

Sol.


$$n' = n \frac{[v+v_0]}{v}$$

$$n'' = n \frac{[v-v_0]}{v}$$

$$\Delta n = n' - n'' = \frac{2nv_0}{v}$$

Given $n = 330\text{Hz}$, $v_0 = 2\text{m/s}$, $v = 330\text{m/s}$

$$\Delta n = \frac{2 \times 330 \times 2}{330} = 4.$$

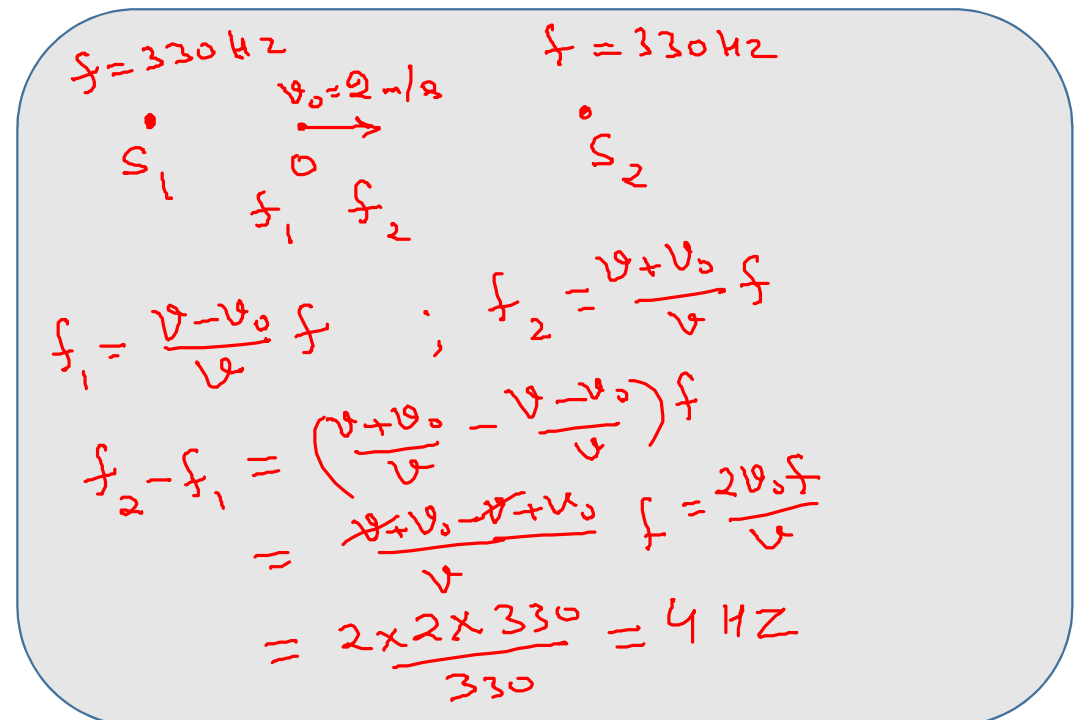

Handwritten solution:

Diagram: Two sirens S_1 and S_2 are shown. An observer O is moving from S_1 towards S_2 with velocity $v_0 = 2 \text{ m/s}$. Sound waves of frequency $f = 330 \text{ Hz}$ are emitted from both sirens. The observed frequencies are f_1 and f_2 .

$$f_1 = \frac{v-v_0}{v} f \quad ; \quad f_2 = \frac{v+v_0}{v} f$$

$$f_2 - f_1 = \left(\frac{v+v_0}{v} - \frac{v-v_0}{v} \right) f$$

$$= \frac{2v_0}{v} f = \frac{2 \times 2 \times 330}{330} = 4 \text{ Hz}$$

Example

A train approaching a hill at a speed of 40 km/hr sounds a whistle of frequency 580 Hz when it is at a distance of 1km from a hill. A wind with a speed of 40 km/hr is blowing in the direction of motion of the train. Find the frequency of the whistle as heard by an observer on the hill. (velocity of sound in air = 1200 km/hr)

(A) 580Hz

(B) 620Hz

(C) 600Hz

(D) 720Hz

Sol. According to Doppler's effect, the apparent frequency when both source and observer move along the same direction is

$$n' = \frac{(v+w)-v_0}{(v+w)-v_s} n$$

Velocity of observer $v_0 = 0$

$$\therefore n' = \frac{(v+w)}{v+w-v_s} n$$

Given $v = 1200$ km/hr, $w = 40$ km/hr,

$v_s = 40$ km/hr. and $n = 580$ Hz

$$\therefore n' = \frac{1200+40}{(1200+40)-40} \times 580 = 599.33 \text{ Hz}$$

$$= 600 \text{ Hz}$$